


### TECHNICAL DATA DB 102(1) 1-phase, DB 102(3) 3-phase

		50 Hz		60 Hz	
Power	DB 102(1)	0.2	kW	0.2	kW
	DB 102(3)	0.2	kW	0.2	kW
Voltage	DB 102(1)	230	V	230	V
	DB 102(3)	230/400	V	230/400	V
Current	DB 102(1)	1.3	A	1.3	A
	DB 102(3)	1.1/0.6	A	1.2/0.7	A
Rev's	DB 102(1)	2700	/min	3250	/min
	DB 102(3)	2800	/min	3300	/min
Noise level		52	dB(A)	55	dB(A)
Protection class		IP 54		IP 54	
Weight	DB 102(1)	7	kg	7	kg
	DB 102(3)	7	kg	7	kg



### PERFORMANCE

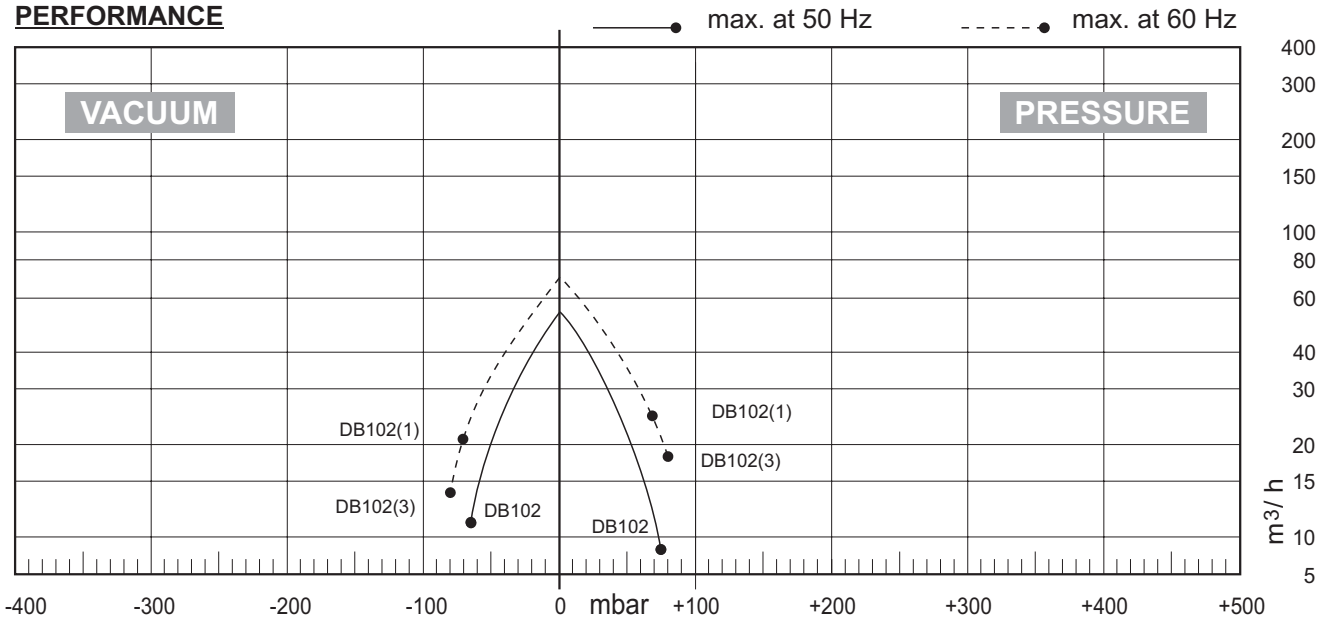

### DIMENSIONS

