



# MEDIO JET 1AC

**4 kW - 5,5 kW (50 Hz)**  
**6,3 kW (60 Hz)**

Del presente modello sono disponibili anche le seguenti versioni speciali:

*This model is also available with the following specifications:*

- **ANODIZZATO** / ANODIZED TREATMENT
- **ANTIDEFAGRANTE** / EXPLOSION PROOF MOTORS
- **TEFLONATO** / TEFLON TREATMENT

- a richiesta **TENSIONI SPECIALI** / SPECIAL VOLTAGES on request

MOTORI COSTRUITI SECONDO LE NORME CEI 2-3 (1988) ISOL. CL F PROT. IP 54



MOTORS CONSTRUCTION CONFORM WITH CEI 2-3 (1988) NORMS. ISOL. CL F PROT. IP 54

ARTICOLO ITEM CODE	kW	V	Hz	assorb. AMP. absorbed. AMPS.	giri/min r.p.m.	LIMITE SERVIZIO MAX CONT. DUTY S1 mmH <sub>2</sub> O	μF/V	dB (A)*	PESO Kg WEIGHT Kg
<b>THREE-PHASE</b>	<b>091950</b>	4	230 Δ 400 Y	50	15,6 9	2900	-1500 +1350	74	56
	<b>091945</b>	4	380 Δ 660 Y	50	9 5,2	2860	-1500 +1350	74	56
	<b>091951</b>	5,5	230 Δ 400 Y	50	20 11,6	2860	-2100 +2000	74	59
		6,3	265 Δ 460 Y	60	20 11,6	3400	-2000 +1900	78	59
	<b>091952</b>	5,5	380 Δ 660 Y	50	11,6 6,7	2880	-2100 +2000	74	59







\* Livello di pressione sonora rilevato secondo le Norme ISO 3746 - 1979 (E). Parametri: r=1 - Rumore di fondo ≤ 51 dB (A) - Strumento: Brüel & Kjær type 2232.

\* Sound pressure level tested according to ISO regulation 3746 - 1979 (E). Parameters: r=1 - Background noise ≤ 51 dB (A) - Instrument: Brüel & Kjær type 2232.


## DIMENSIONI DIMENSIONS

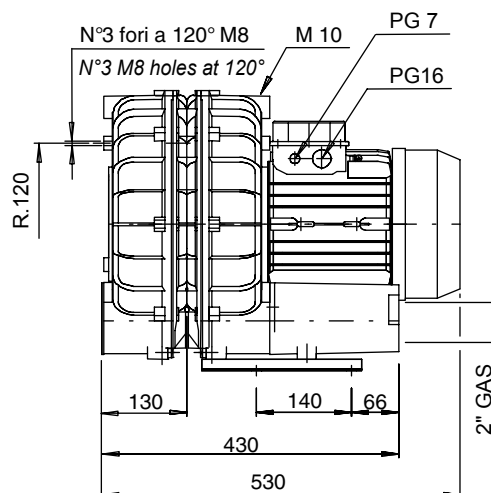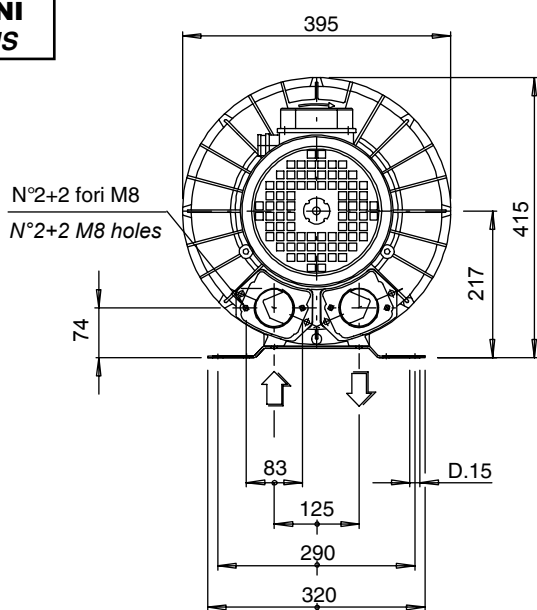

Le dimensioni di ingombro sono espresse in millimetri  
 All dimensions are in mm.

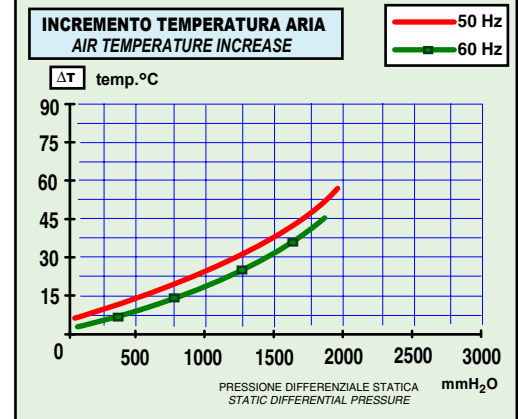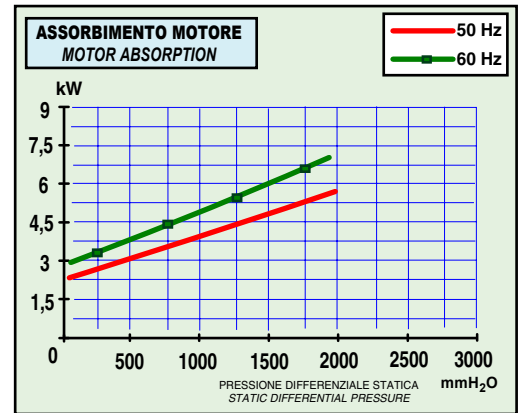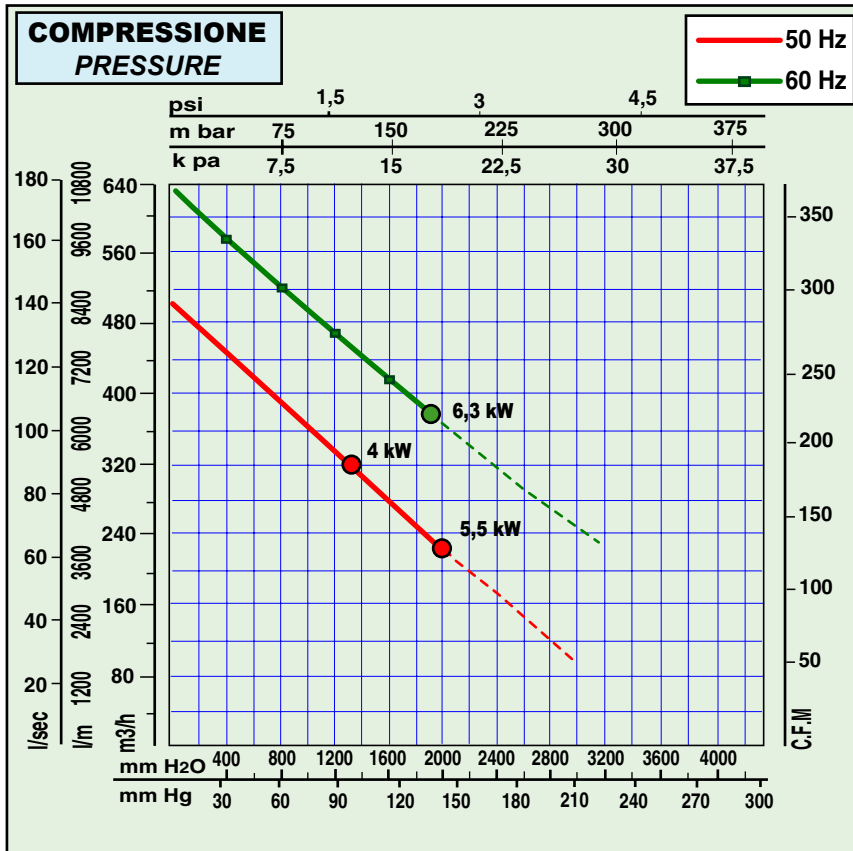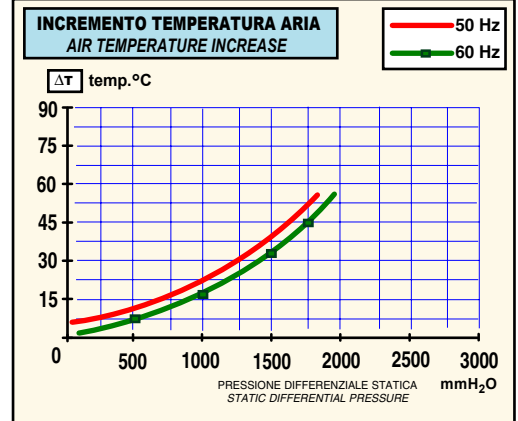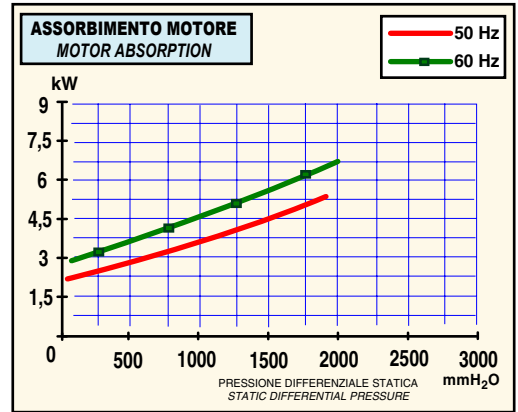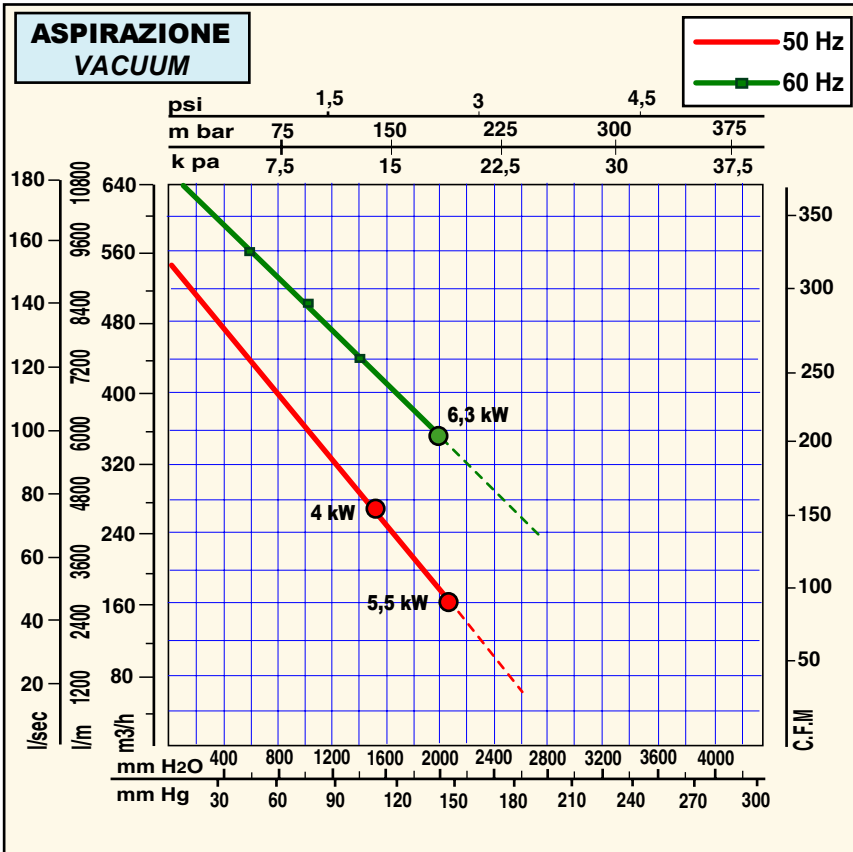

Tutti i dati della presente scheda tecnica si intendono indicativi e potranno essere modificati dalla casa in qualsiasi momento senza nessun preavviso.  
 La curva di aspirazione è riferita ad aria alla temperatura media di 20 °C e 1013 mbar sul raccordo di mandata.  
 La curva di compressione è riferita ad aria alla temperatura media di 20 °C e 1013 mbar sul raccordo di aspirazione.  
 All data is intended as an indication and may be modified without prior notice.  
 The vacuum curve is valid for pumping air, with a temperature of 20°C at the inlet flange and with a pressure of 1013 mbar at the discharge port.  
 The pressure curve is valid for pumping air, with an average temperature of 20°C and 1013 mbar at the inlet flange.


 Valore max di pressione per servizio continuo  
 Max value for continuous duty